

Evacuate Generator Module (EVACGEN-NZ)

Head Office

Wellington

PO Box 35-063
Naenae, 5011
Lower Hutt
17 Eastern Hutt Rd
Wingate
Lower Hutt 5019
Tel (04) 567-3229
Fax (04) 567-3644

www.pertronic.co.nz

sales@pertronic.co.nz
tech@pertronic.co.nz

Auckland Office

PO Box 15-867
New Lynn
Auckland 0640
359 Onehunga Mall
Onehunga
Auckland 1061
Tel (09) 633-0226
Fax (09) 633-0228



ISO 9001: 2008

International Standards
Certifications
QAC/R64/0012

Product Overview:

The Pertronic Evacuate Generator Module extends the **F100A** and **F120A** analogue addressable automatic fire alarm system by allowing a fully monitored interface between the control panel and a third party 100VRMS amplifier.

The Evacuate Generator Module connects to a Pertronic **F100A** or **F120A** using four wire RS485 or directly via a monitored bell circuit.

It has four selectable inputs, each of which can be programmed to produce different tones when activated. Two of the tones may include a voice message.

Connection:

The Evacuate Generator Module typically connects onto the standard RS485 bus (2-wire data and 24Vdc power) for communications. An additional 24Vdc power connection is also required, which may be from an external isolated power supply. Additional information can be obtained in the Evacuate Generator Module Technical Manual.

Features:

- ▶ Dual microphone / line inputs, with individual volume control and Press to Talk (PTT)
- ▶ Tone and line output volume controls
- ▶ Optional tone selection
- ▶ Four pull down control inputs
- ▶ Bell circuit input and output connections
- ▶ Closed loop Amplifier monitoring
- ▶ 100VRMS 250W switching capability
- ▶ 42 tone/voice combinations available
- ▶ 2 voice messages available
- ▶ Configurable on site without tools
- ▶ Monitored Fire Panel input
- ▶ External Fault Input
- ▶ Active and Fault relay outputs




Evacuate Generator Module

Specifications:

Electrical:	Operating Voltage External Power 19 to 29Vdc	Quiescent Current 35mA @ 24Vdc RS485 Comms 30mA	Alarm Current 105mA
Environmental:	Operating Temperature Range 0 to 30°C		Humidity 10 to 95% RH (non-condensing)
Mechanical:	Dimensions (H x W x D mm) 22 x 97 x 170		Weight 200gms

- ▶ External Power: Electrically isolated from Communications power
- ▶ Quantity: 8 fully monitored Evac Generator Modules on the RS485 bus
- ▶ RS485 Addressing: Each Module uses an RS485 LED Mimic address space. Addresses must exist from 1 and be consecutive to 8 maximum. Not required for Bell or direct Switch Input activation
- ▶ Frequency Response: 100Hz to 20kHz
- ▶ Microphone impedance: 680Ω balanced
- ▶ Microphone Sensitivity: 1.5mV - 15mVRMS
- ▶ Line Input impedance: 68kΩ
- ▶ Line Input Sensitivity: 100mV - 1.5VRMS
- ▶ Line Output: 1.5VRMS maximum

Evacuate Generator Module Connections:

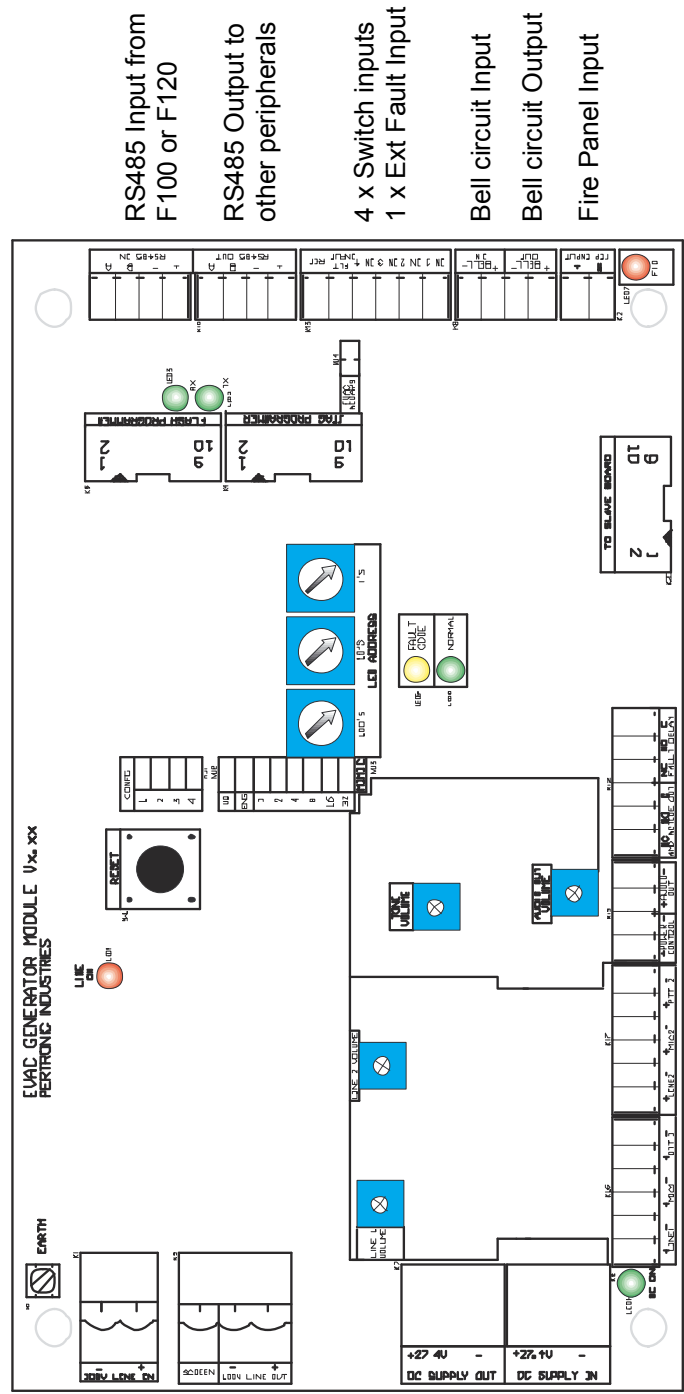

100Vrms from Amplifier

100Vrms to Speakers

24Vdc Supply Output

24Vdc Supply Input

RS485 Input from F100 or F120

RS485 Output to other peripherals

4 x Switch inputs
1 x Ext Fault Input

Bell circuit Input

Bell circuit Output

Fire Panel Input

Product Codes

NZS Code	Description	NZPFA Listing No
EVACGEN-NZ	Evacuator Generator Module with Evac and Alert messages:	
Please call	Evacuator Generator Module with Custom message/tone:	

PERTRONIC INDUSTRIES LTD

Head Office:
17 Eastern Hutt Rd, Wingate, Lower Hutt 5019
Telephone (04) 567-3229 Fax (04) 567-3644

www.pertronic.co.nz
sales@pertronic.co.nz
tech@pertronic.co.nz

Auckland Office:
59 Onehunga Mall, Onehunga, Auckland 1061
Telephone (09) 633-0226 Fax (09) 633-0228

'Pertronic' and 'Firetronix' are registered trademarks of Pertronic Industries Ltd