

PLS Sounder/LED Alarm

(AS 2220 Sounder)

Head Office

Wellington

PO Box 35-063
Naenae, 5011
Lower Hutt
17 Eastern Hutt Rd
Wingate
Lower Hutt 5019
Tel (04) 567-3229

www.pertronic.co.nz

sales@pertronic.co.nz
tech@pertronic.co.nz


Auckland Office

PO Box 15-867
New Lynn
Auckland 0640
359 Onehunga Mall
Onehunga
Auckland 1061
Tel (09) 633-0226

Product Overview:

The **Pertronic PLS Sounder / LED Alarm** complements the PS range of Sounders by providing a visible alarm:

- ▶ Flashes at a rate corresponding to the Evacuation and Alert tones specified by AS 2220.1-1989.
- ▶ The audible output has a maximum sound level of 98 dBA - the sound level may be adjusted by a volume control
- ▶ The light output is generated from a matrix of 6 red LED emitters in one housing
- ▶ If desired, the sounder and LED can be wired separately for applications where the Sounder or LED may be required to work independently of each other
- ▶ Is normally connected to the monitored Bell or Sounder output of a Fire Alarm panel and is activated when the output circuit voltage polarity is reversed to the Alarm state
- ▶ May be mounted in standard single-gang flush or surface-mount electrical fittings and is supplied with a protective plastic cover for installation during building construction.

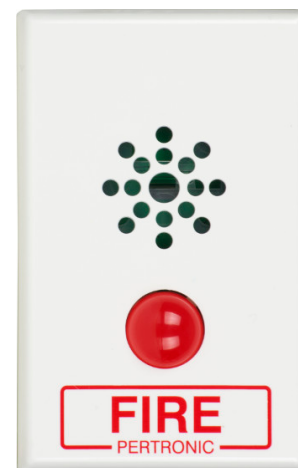

Features:

- ▶ Maximum sound level of 98 dBA
- ▶ Light output of 30mcd maximum, 120° viewing angle
- ▶ Available in two colours : Red or White

Specifications:

Dimensions: 117 x 74 x 12 mm (H x W x D - LED Dome height above flush box)
Designed to fit into a standard, single flush or surface-mount box.

Sound Level Output: Sound pressure level at 1m (peak ± 3 dBA)
Alert: 95 dBA @ 12 Vdc; Evacuation: 98dBA @ 24 Vdc



Light Level Output: 30 mcd maximum, 120° viewing angle

Power Requirements:



- Operating Voltage** 9.5 to 30 Vdc
- Quiescent Current: Non-Alarm** 0.2 μ A @ 12 Vdc
0.4 μ A @ 24 Vdc
- Operating Current: Alarm State** 12 mA average, 20 mA peak @ 12 Vdc
24 mA average, 30 mA peak @ 24 Vdc

Controls: Third wire for Alert mode - connected to 0 V for Alert operation.

AS 2220 Tone Characteristics:

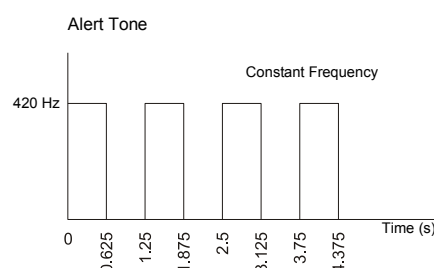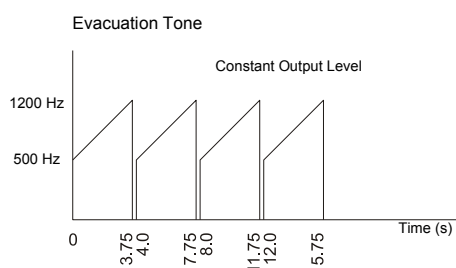


AS 2220 Flash Rates:

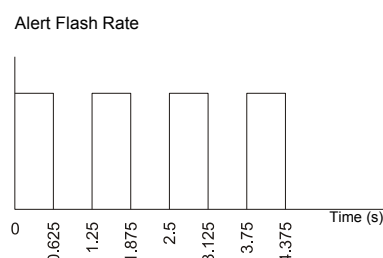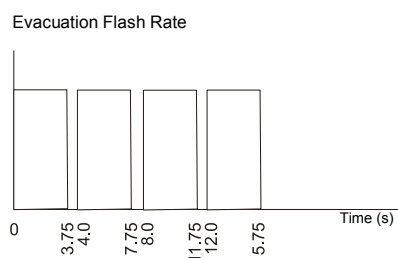

Ordering Information:

Product Code	Description	NZFPA Listing No
PLS-R	Lamp Sounder, AS2220, Flush Mount, Red Frontplate	PI/408
PLS-W	Lamp Sounder, AS2220, Flush Mount, White Frontplate	PI/408

Terminal Layout:

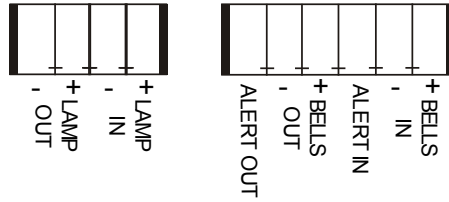

Standard (Visual and Audible) Operation:

The PLS is usually connected to the panel Bells circuit with the Lamp inputs disconnected. In this mode both Sounder and Lamp activate in the event of bell reversal.

When the panel Bell circuit is inactive (OFF), the status of the Bell circuit is monitored by applying a negative voltage to the PLS BELL '+' terminal and a positive voltage to the PLS BELL '-' terminal and reading the current for presence of the 10 kΩ EOL resistor. The quiescent current drawn by the **PLS** under this condition is less than 0.4 μA.


When the panel Bell circuit is active (ON), the Bell circuit voltage reverses applying a positive voltage to the PLS BELL '+' terminal and a negative voltage to the PLS BELL '-' terminal, triggering the PLS to operate.

The Evacuation mode is generated if the Alert terminal is open.

- the LED flashes at approximately 0.5 Hz.
- The Alert mode is generated by connecting the Alert terminal of the PLS to 0V (negative).
- the LED flash rate corresponds to the Alert tone pulse rate at approximately 0.8 Hz.

PLS Standard (Visual and Audible) Operation

Bell Input	Alert Terminal	Sound Generated	Flash Generated
Monitor Mode	Optional	None	None
Active	Open	Evacuate	Flash
Active	0V	Alert	Flash

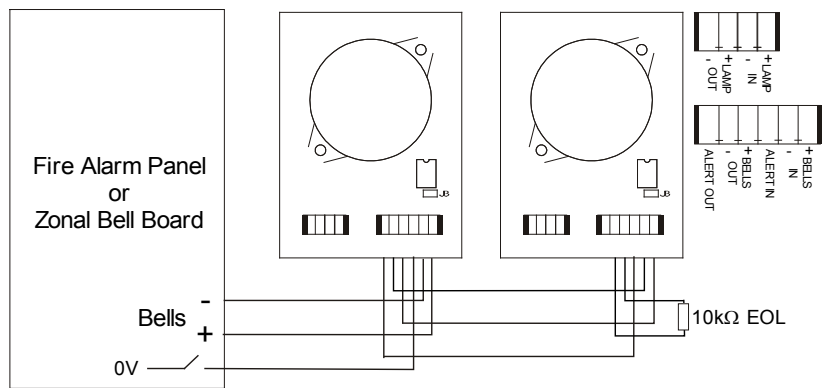

Lamp Only (Visual) Operation:

The PSL Lamp can be operated separately by connecting the Panel Bells to the Lamp Input. Bell terminals '+' and '-' are connected to the corresponding Lamp '+' and '-' terminals.

When the panel Bell circuit is inactive (OFF), the status of the Bell circuit is monitored by applying a negative voltage to the PLS LAMP '+' terminal and a positive voltage to the PLS LAMP '-' terminal and reading the current for presence of the 10 kΩ EOL resistor. The quiescent current drawn by the **PLS** under this condition is less than 0.4 μA.


When the panel Bell circuit is active (ON), the panel Bell circuit voltage reverses applying a positive voltage to the PLS LAMP '+' terminal and a negative voltage to the PLS LAMP '-' terminal, triggering the PLS LAMP to flash at approximately 0.5 Hz.

The Evacuation mode is generated if the Alert terminal is open

- the LED flashes at approximately 0.5 Hz.
- The Alert mode is generated by connecting the Alert terminal of the PLS to 0V (negative).
- the LED flash rate corresponds to the Alert tone pulse rate at approximately 0.8 Hz.

PLS Lamp Only Operation

Bell Input	Alert Terminal	Sound Generated	Flash Generated
Monitor Mode	Optional	None	None
Active	Optional	None	Flash

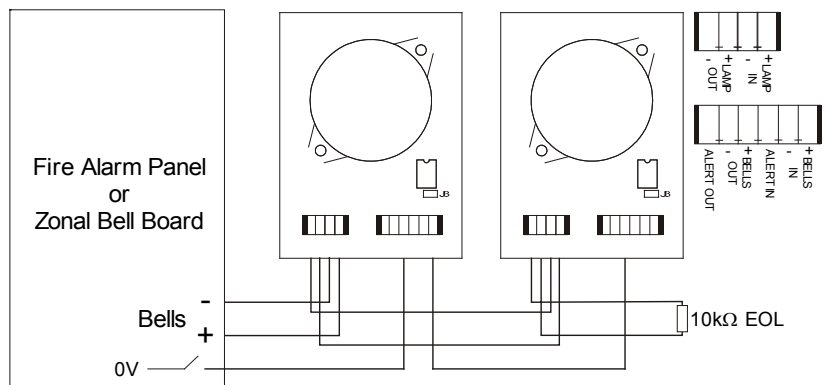

PERTRONIC INDUSTRIES LTD

Head Office:
17 Eastern Hutt Rd, Wingate, Lower Hutt
Tel (04) 567-3229

www.pertronic.co.nz
sales@pertronic.co.nz
tech@pertronic.co.nz

Auckland Office:
359 Onehunga Mall, Onehunga, Auckland
Tel (09) 633-0226