

### Head Office

#### Wellington

PO Box 35-063  
Naenae, 5011  
Lower Hutt  
17 Eastern Hutt Rd  
Wingate  
Lower Hutt 5019  
Tel (04) 567-3229  
Fax (04) 567-3644

www.pertronic.co.nz

sales@pertronic.co.nz  
tech@pertronic.co.nz

#### Auckland Office

PO Box 15-867  
New Lynn  
Auckland 0640  
359 Onehunga Mall  
Onehunga  
Auckland 1061  
Tel (09) 633-0226  
Fax (09) 633-0228



Certificate No:  
205487-2016-  
AQ-AUS-JAS-ANZ

### Product Overview:

The Pertronic Industries **F1-3** is a low cost, single zone electronic Fire Alarm Control Panel for applications where brigade connection is not a requirement.

The **F1-3** complies with the New Zealand Fire Alarm Standard (NZS 4512:2010 / NZS 4512:2003) for single zone Fire Alarm system.

The **F1-3** supports Smoke Detectors, Indicating Manual Call-Points and Indicating Heat Detectors with the facility to internally mount one 20 Watt evacuation amplifier.

### Features:

- ▶ 'Normal', 'Defect' and 'Fire' indication on front panel
- ▶ 'Internal Bell Cut-Off' and 'External Bell Cut-Off' (BCO)
- ▶ Alarm reset available from a front panel key-switch
- ▶ Trial Evacuation key-switch
- ▶ Automatic Alarm Verification Facility (AVF) provides substantial protection against transient false alarms
- ▶ Bell circuit, monitored with 10 k Ω EOL resistor
- ▶ Optional 100 Vrms line amplifier with voice Evacuation message
- ▶ 'Battery Absent' detection circuitry
- ▶ Earth Leakage monitoring
- ▶ Integrated piezo Alarm and Defect sounder warning
- ▶ On-board System 'Defect' LED indicates source of fault
- ▶ Door Interlock
- ▶ Fire and Defect clean contact relays (C/O)

### Detector Circuit

- ▶ One monitored zone, terminated with a 10 kΩ EOL resistor
- ▶ Accepts a mix of Smoke Detectors, Indicating Heat detectors and Indicating Manual Call-Points (MCP)
- ▶ The **Zone Circuit** may have:
  - ▶ Up to 30 System Sensor 100 Series or 300 Series Photo-Electric smoke detectors, and
  - ▶ A total of 100 Pertronic Indicating Heat Detectors and Pertronic Indicating Manual Call-Points (MCP) (see note on page 2).
- ▶ Smoke detectors operate after a 1 second delay
- ▶ Indicating Heat detectors and Indicating MCP give instantaneous (less than 0.5 sec) response
- ▶ Zone circuit self-test on start-up and every 24 hours

### Optional Evacuation Amplifier and Speakers


- ▶ Pertronic 20 Watt Evacuation Amplifier **EVAC20W12V** with monitored 100 Vrms line output
- ▶ Recommended sounders
  - ▶ Pertronic PSSB401 Speaker Bases
  - ▶ Pertronic PSS1 100 Vrms Speakers
  - ▶ Pertronic PSS3 100 Vrms Speakers



### Specification:

<b>Electrical:</b>	<b>Power Supply</b> 230 Vac, 50 Hz, 4 W 13.7 Vdc, 275 mA	<b>Quiescent Current</b> 32 mA at 12 Vdc	<b>Defect Current</b> 14 mA at 12 Vdc	<b>Alarm Current</b> 140 mA at 12 Vdc with no load on external sounders	<b>Bell Output</b> 12 Vdc, 3 Amps
<b>Battery</b>	<b>Battery Charger</b> Integral Float Charger 13.7 Vdc, 250 mA		<b>Battery Type</b> Sealed lead acid (gelcell) 12 Vdc, 7 AHr - internally mounted		
<b>Environ-mental:</b>	<b>Operating Temperature Range</b> 0 to +40 °C		<b>Humidity</b> 10 to 95% RH (non-condensing)		
<b>Mechanical:</b>	<b>Overall Dimensions (H x W x D mm)</b> 350 x 245 x 87 (See page 2 note)	<b>Weight</b> 2.2 kg - excluding battery	<b>Cabinet Material</b> 1.2 mm mild steel, powder coated	<b>Colour</b> Beige - other colours optional	

**Block Diagram:**

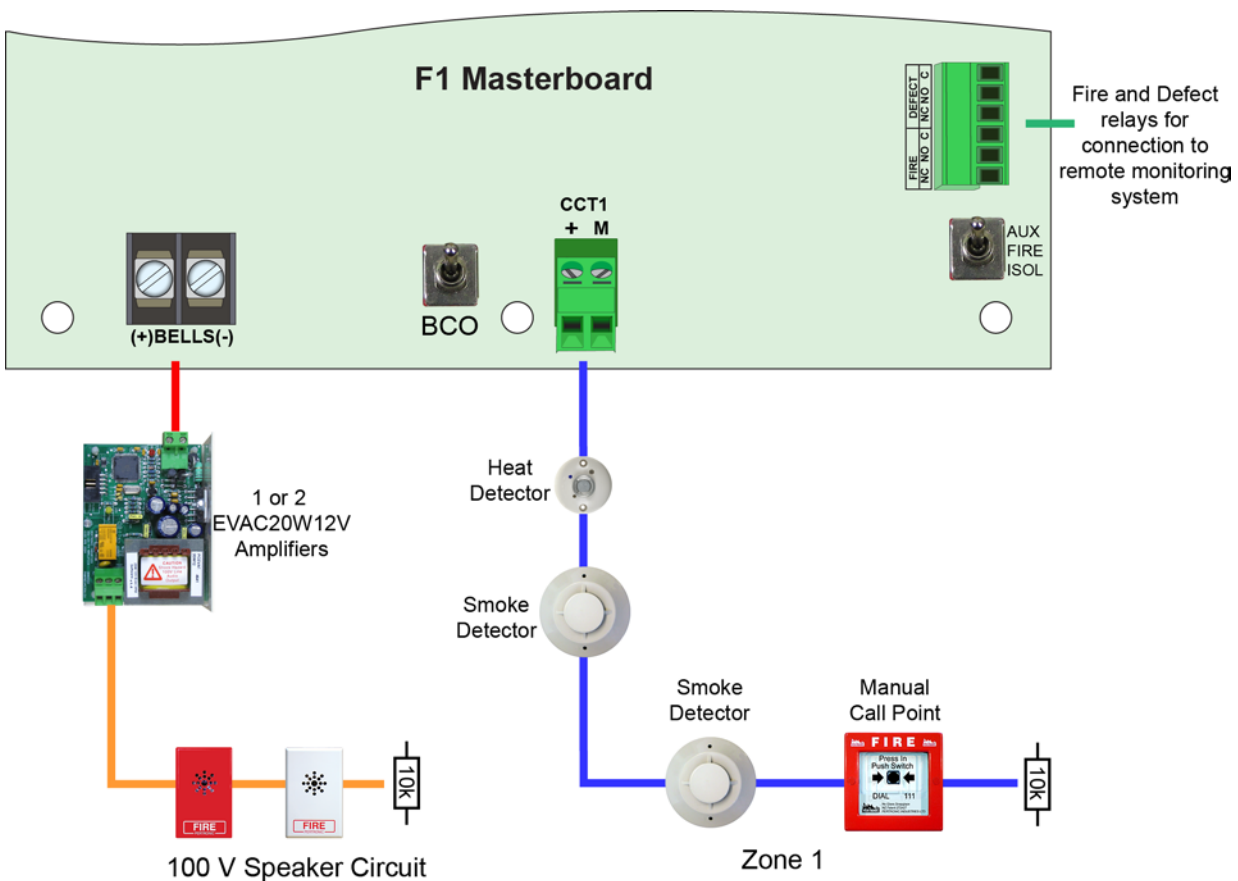

Ordering Information:		
Product Code	Description	NZFPA Listing
F1-3	F1, 1cct Fire Panel NZS 4512:2010	PI/122
F1-3EA	F1, 1cct Panel with 20W Evacuation Amplifier NZS 4512:2010	PI/122
MI16F874A-I/L	PIC Microprocessor 16F874A-I/L, PLCC44	
EVAC20W12V	Evacuation Amplifier, 20W 12V	PI/638
PSSB401	Pertronic Speaker and B401 Conventional Base	PI/642
SMK400E	Surface Mount for B401 and B501 Base (Round 152 mm)	
PSS1-R	Pertronic Sounder Speaker 1W, 100V ; Red	PI/641
PSS1-W	Pertronic Sounder Speaker 1W, 100V ; White	PI/641
PSS3	Pertronic 100V 3W Ceiling Speaker	

**Important Notes:**

- ▶ A hard short-circuit or open-circuit produces a 'Defect' signal.
- ▶ Non-indicating Heat Detectors and Manual Call-Points will NOT produce a 'Fire' signal when triggered and MUST NOT be used with the NZS 4512:2010 standard **F1-3** panel.
- ▶ Within the total allowance of 100 indicating devices per zone circuit, the circuit is limited to a maximum of 50 indicating heat detectors.
- ▶ All dimensions are nominal. Actual dimensions may vary slightly due to production tolerances.

**PERTRONIC INDUSTRIES LTD**

**Head Office:**

17 Eastern Hutt Rd, Wingate, Lower Hutt 5019  
Telephone (04) 567-3229 Fax (04) 567-3644

www.pertronic.co.nz  
sales@pertronic.co.nz  
tech@pertronic.co.nz

**Auckland Office:**

59 Onehunga Mall, Onehunga, Auckland 1061  
Telephone (09) 633-0226 Fax (09) 633-0228

'Pertronic' and 'Firetronix' are registered trademarks of Pertronic Industries Ltd